

Motive Battery

Energy Storage Battery

EVERESTEnergy

Reserve Battery

Motorcycle Battery

Motive Battery-Deep Cycle Type-TNE Series

EVEREST TNE12-125 (12V-106AH/C5)


GENERAL FEATURES

- Oxygen recombination technology: Maintenance Free VRLA Battery, no need to add water or acid
- The patent grid alloy: less gassing, low self-discharge, excellent corrosion resistance performance
- Special paste formula: additives are added to improve deep discharge, long cycle life
- The patent Nano silica gel electrolytes, extend cycle life and improve the deep discharge performance
- ABS container: increase the strength of battery (Flame-retardant ABSUL94-V0 is optional)

Dimension

Unit:mm

Length	330±2mm / 12.99inch
Width	171±2mm / 6.73inch
Container Height	214±2mm / 8.43inch
Total Height	214±2mm / 8.43inch

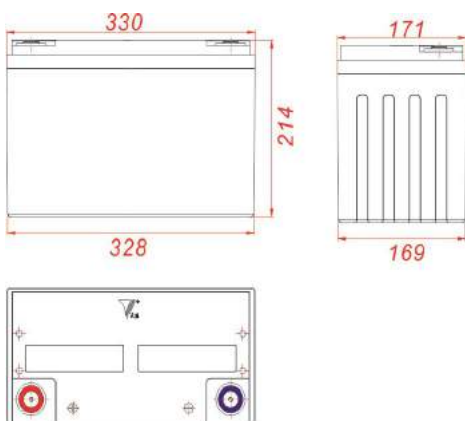

Application

- Electric tools or toys
- Electric Bicycle/Tricycle
- Golf trolleys and golf cart
- Patrol car
- Electric Sight-seeing Tour Bus
- Sweeper
- Wheelchairs
- Lawn mowers
- Illumination light


Terminal

Unit:mm

Terminal Type: I7

Weight

33.5kg 73.85lbs



This document is subject to change without prior notification

- Motive Battery
- Energy Storage Battery
- Reserve Battery
- Motorcycle Battery


TNE12-125

Specificaion


Nominal Voltage	12V	
Nominal Capacity	125Ah	
Rated Capacity	C20(1.80V/cell)	125Ah
Capacity (25°C)	C10(1.80V/cell)	114Ah
	C5(1.75V/cell)	107Ah
Container Material	ABS (Flame-retardant ABSUL94-V0 is optional)	
Operating Temperature Range	Discharge	-20 ~ +50°C
	Charge	0 ~ +40°C
	Storage	-15 ~ +40°C
Capacity Effected by Temperature	40°C / 104°F	106%
	25°C / 77°F	100%
	0°C / 32°F	86%
	-10°C / 14°F	65%
Charge Method	Please refer to the "Charge Characteristics (25°C)" below	
Monthly Self Discharge	<3%, TNE series stored at 25°C require a supplementary charge every six months, the charging interval would shrink when the ambient temperature went higher	

Performance Curve


Discharge Characteristics (25°C)

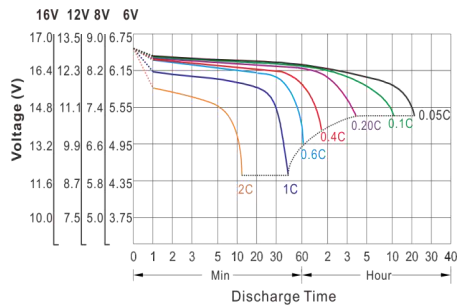

Charge Characteristics (25°C)

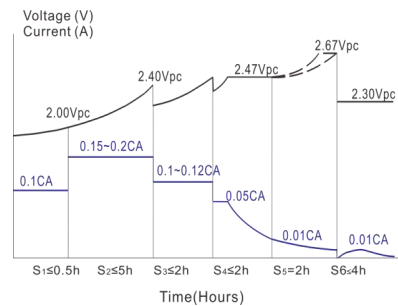

Cycle Lives With Depth Of Discharge

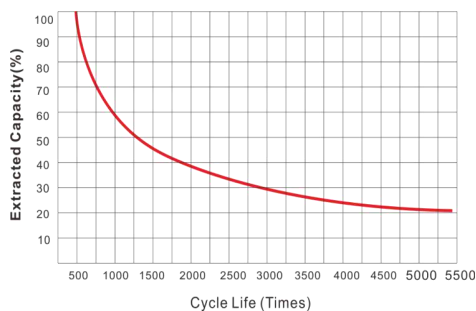

Self-Discharge Characteristics

